


OCEANFLEXX PU 2.0

Reinforced PU spiral hose for demanding aquaculture applications

Applications	conveying of abrasive media, feed conveying, conveying technology, fish farming, pump technology
Structure	Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 100°C, short term up to 125°C
Properties	excellent abrasion resistance, very high pressure resistance very high vacuum resistance, very smooth inside, good ozone- & UV-resistance hydrolysis & microbe resistant, good tensile strength crush-resistant
Norms	certified according NS 9416:2013

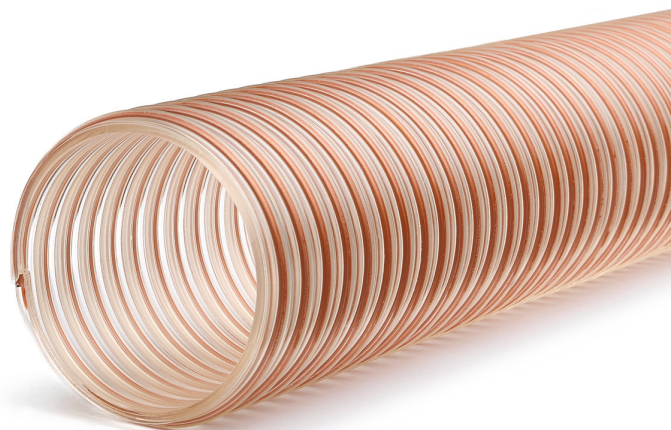

**made
in
Germany**

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
305	320,00	2,00	750	0,86	0,25	60,25	10	09520305-1000-000-00
305	320,00	2,00	750	0,86	0,25	90,37	15	09520305-1500-000-00
356	371,00	2,00	875	0,77	0,15	70,07	10	09520356-1000-000-00
356	371,00	2,00	875	0,77	0,15	105,11	15	09520356-1500-000-00
406	421,00	2,00	1.015	0,63	0,10	79,71	10	09520406-1000-000-00
406	421,00	2,00	1.015	0,63	0,10	119,56	15	09520406-1500-000-00
508	523,00	2,00	1.270	0,40	0,05	99,38	10	09520508-1000-000-00
508	523,00	2,00	1.270	0,40	0,05	149,04	15	09520508-1500-000-00