


OCEANFLEXX PU 1.4

Applications	fish farming, extraction systems, conveying technology, pump technology, water drain
Structure	TPU / Polyether-Polyurethane, transparent, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 100°C, short term up to 125°C
Properties	good flexibility, smooth inside, hydrolysis & microbe resistant, high vacuum resistance high pressure resistance, good tensile strength
Norms	certified according NS 9416:2013

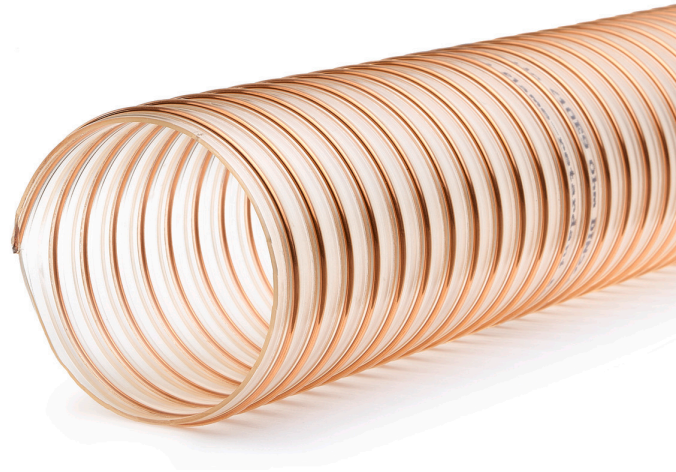

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
102	112,00	1,40	102	1,21	0,40	12,25	10	09514102-1000-000-00
102	112,00	1,40	102	1,21	0,40	18,37	15	09514102-1500-000-00
127	137,00	1,40	127	0,88	0,25	15,11	10	09514127-1000-000-00
127	137,00	1,40	127	0,88	0,25	22,66	15	09514127-1500-000-00
152	162,00	1,40	152	0,77	0,20	21,89	10	09514152-1000-000-00
152	162,00	1,40	152	0,77	0,20	32,83	15	09514152-1500-000-00
160	170,00	1,40	160	0,66	0,20	23,00	10	09514160-1000-000-00
160	170,00	1,40	160	0,66	0,20	34,50	15	09514160-1500-000-00
203	214,00	1,40	203	0,55	0,14	33,56	10	09514203-1000-000-00
203	214,00	1,40	203	0,55	0,14	50,34	15	09514203-1500-000-00
254	265,00	1,40	254	0,38	0,10	41,75	10	09514254-1000-000-00
254	265,00	1,40	254	0,38	0,10	62,63	15	09514254-1500-000-00
305	316,00	1,40	305	0,29	0,09	49,94	10	09514305-1000-000-00
305	316,00	1,40	305	0,29	0,09	74,91	15	09514305-1500-000-00
356	367,00	1,40	356	0,28	0,09	62,16	10	09514356-1000-000-00
356	367,00	1,40	356	0,28	0,09	93,24	15	09514356-1500-000-00
406	417,00	1,40	406	0,25	0,09	106,10	15	09514406-1500-000-00
406	417,00	1,40	406	0,25	0,09	70,74	10	09514406-1000-000-00
508	519,00	1,40	508	0,10	0,07	88,23	10	09514508-1000-000-00
508	519,00	1,40	508	0,10	0,07	132,34	15	09514508-1500-000-00